

WipeAble

Specifications

Curtain Material:

Super Bio Stat™: Specially formulated with a protective coating that is bacterial and wear resistant.

Mesh:

Eze-Mesh™ material available in 12" (30.48cm), 20" (50.8cm), 22" (55.88cm), 24" (60.96cm), 28" (71.12cm) and 36" (91.44cm) standard heights. #50 (1/2" hole)


General:

Curtains have been tested and pass fire safety standards


- Security curtain design (style #4) provides partial privacy in behavioral health facilities, prisons, massage schools or lab testing areas

Styles:

1. Mesh at top for air/steam circulation
2. Complete top-to-bottom coverage of same material

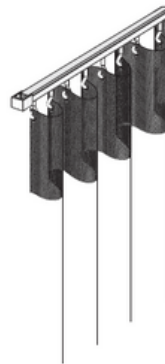

Style 1

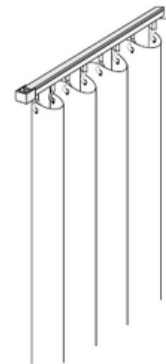

Style 2

WipeAble

Specificationa

Part 1 - General

1.01 SUMMARY

A. Shower Curtain

1.02 SECTION INCLUDES

A. Curtains

1.03 REFERENCES

A. National Fire Protection Association (NFPA)

1.04 SYSTEM DESCRIPTION

A. Performance Requirements: Provide shower curtains that conform to the following requirements of regulatory agencies and the quality control of Clickeze®, Inpro Corporation.

1. Fire Performance Characteristics: Provide curtains that conform with NFPA 701, Fire Tests for Flame and Resistant Textiles and Films.

1.05 SUBMITTALS

A. Product Data: Manufacturer's printed product data for each type of shower curtain specified.

B. Material Samples: Swatch cards of material samples illustrating color and finish.

C. Manufacturer's Care Instruction: Printed care instructions for each curtain.

1.06 DELIVERY, STORAGE AND HANDLING

A. Deliver materials in unopened factory packaging to the jobsite.

B. Inspect materials at delivery to assure that specified products have been received.

C. Store in original packaging in a climate controlled location away from direct sunlight.

1.07 PROJECT CONDITIONS

A. Environmental Requirements: Products must be installed in an interior climate controlled environment.

1.08 WARRANTY

A. Standard Clickeze® Limited Warranty against material and manufacturing defects.

Part 2 - Products

2.01 MANUFACTURER

A. Acceptable Manufacturer
Clickeze®, Inpro Corporation, PO Box 406 Muskego, WI 53150 USA;
Telephone: 800.222.5556, Fax: 888.715.8407, Internet address: <http://www.inprocorp.com>
B. Substitutions: Not permitted
C. Provide all cubicle curtains from a single source.

2.02 MATERIALS

A. Shower Curtain

1. Vinyl Material: Provide heavy duty, 13 gauge, flame retardant, antimicrobial Revolve vinyl. Features include: Polyester reinforced medical grade PVC, anti-static, antimicrobial, flame retardant, stain resistant, odor resistant, water repellent, wear resistant, scrubbable and colorfast.

2.03 FINISH AND COLOR

A. Shower Curtain Vinyl: Select solid or patterned opaque Revolve material or light transmitting vinyl from manufacturer's standard selection.

2.04 FABRICATION

A. Shower Curtains

1. Curtain Width: Manufacture curtains of one piece, sized to 10% wider than the track length but no less than 1' (304.8mm) extra fullness. Width tolerance $\pm 3"$.
2. Curtain Height: Specify height. Shower curtains hang $1/2"$ (12.7mm) above floor. Tub curtains hang 6" (152.4mm) above floor. Height tolerance $\pm 1/2"$.
3. Curtain Heading: Manufacture with or without heading of open mesh cloth, to the same width as the curtain material. Include 4-ounce (113.4g) nickel-plated grommets, 6" (152.4mm) on center for carriers. Top hem to be triple-turned hem over nylon tape for rugged wear.
4. Seams: Curtains are to be seamless when possible with sanitary "no scum" side and bottom edges. Sewing thread to be triple-ply twisted nylon.

Part 3 - Execution

3.01 EXAMINATION

A. Examine areas and conditions in which the cubicle tracking systems will be installed.

1. Complete all finishing operations, including painting, before beginning installation of cubicle tracking system materials.
2. Verify that surfaces and above ceiling supports are ready to receive work.

3.02 PREPARATION

A. General: Prior to installation, clean substrate to remove dust, debris and loose particles.

3.03 INSTALLATION

A. General: Locate the cubicle track as indicated on the approved detail drawing for the appropriate substrate and in compliance with the Clickeze® installation instructions.

B. Installation of Cubicle Tracking Systems:

1. Install cubicle track, secure, rigid, and true to ceiling line.
2. Slide carriers onto the track.
3. Install end cap or stop device.
4. Secure or suspend track to ceiling system. Install with mechanical fasteners or Gridclips.
5. Install curtains on carriers ensuring smooth operation.

3.04 CLEANING

A. At completion of the installation, remove any debris and clean surfaces in accordance with the Clickeze® clean-up and maintenance instructions.